




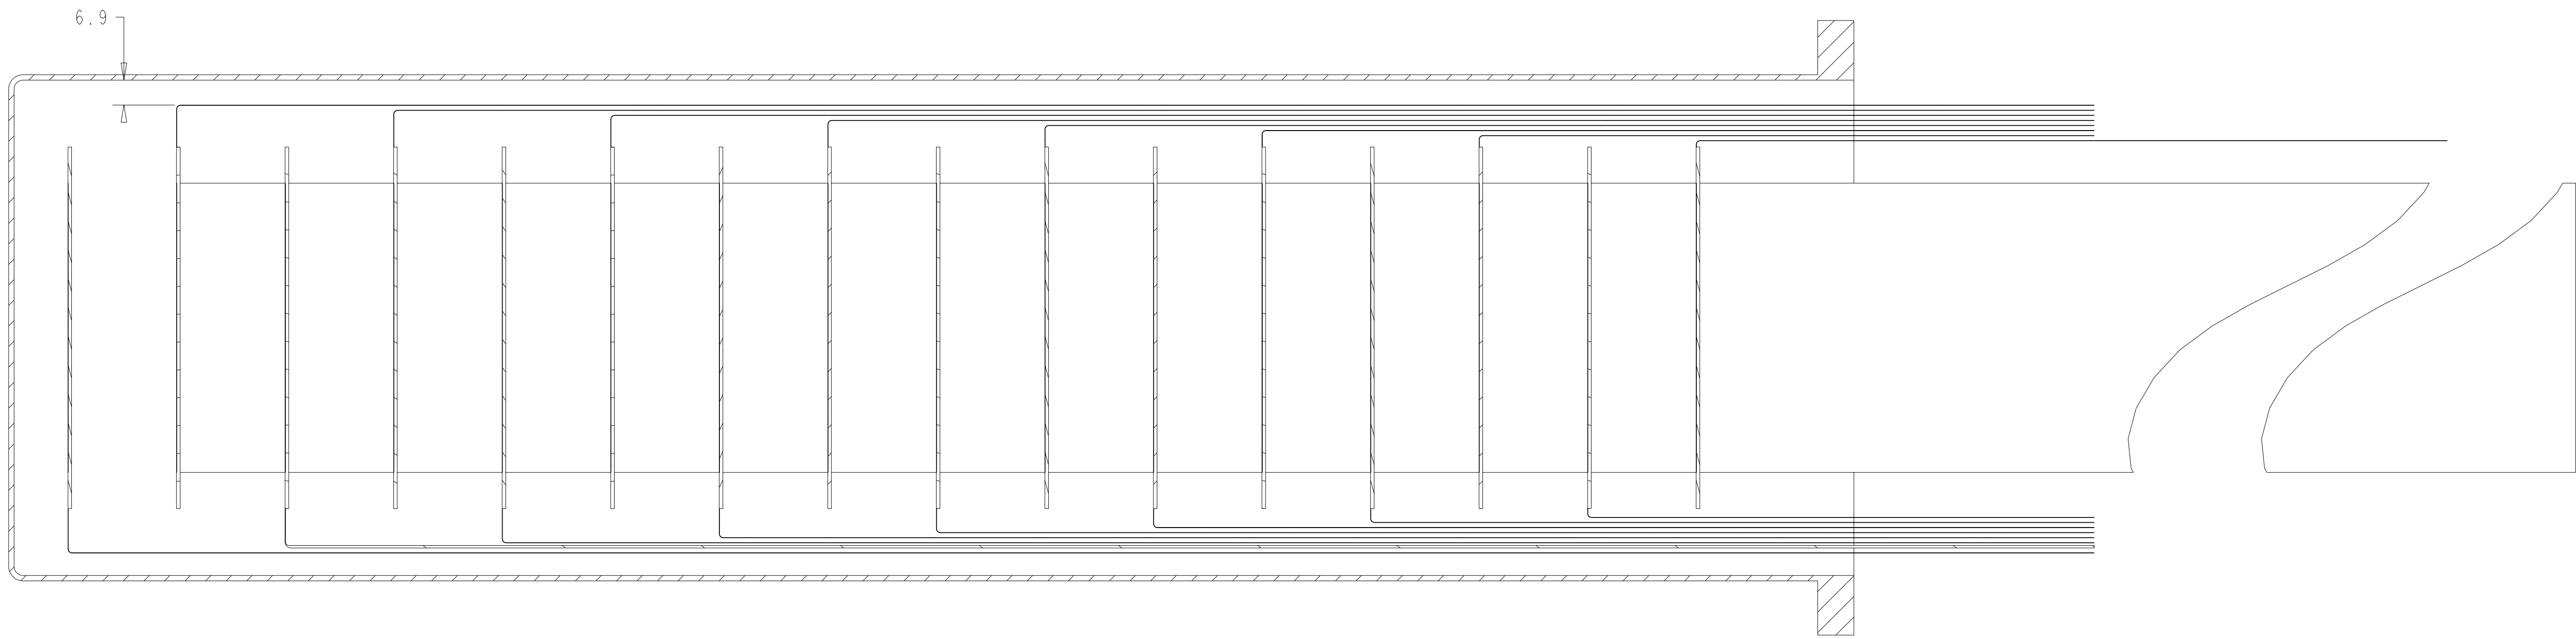

576
OVERALL LENGTH IF CABLES
ARE CUT TO ALLOW FOR 30mm
INCREMENTAL STEPS IN DETECTOR
POSITIONS

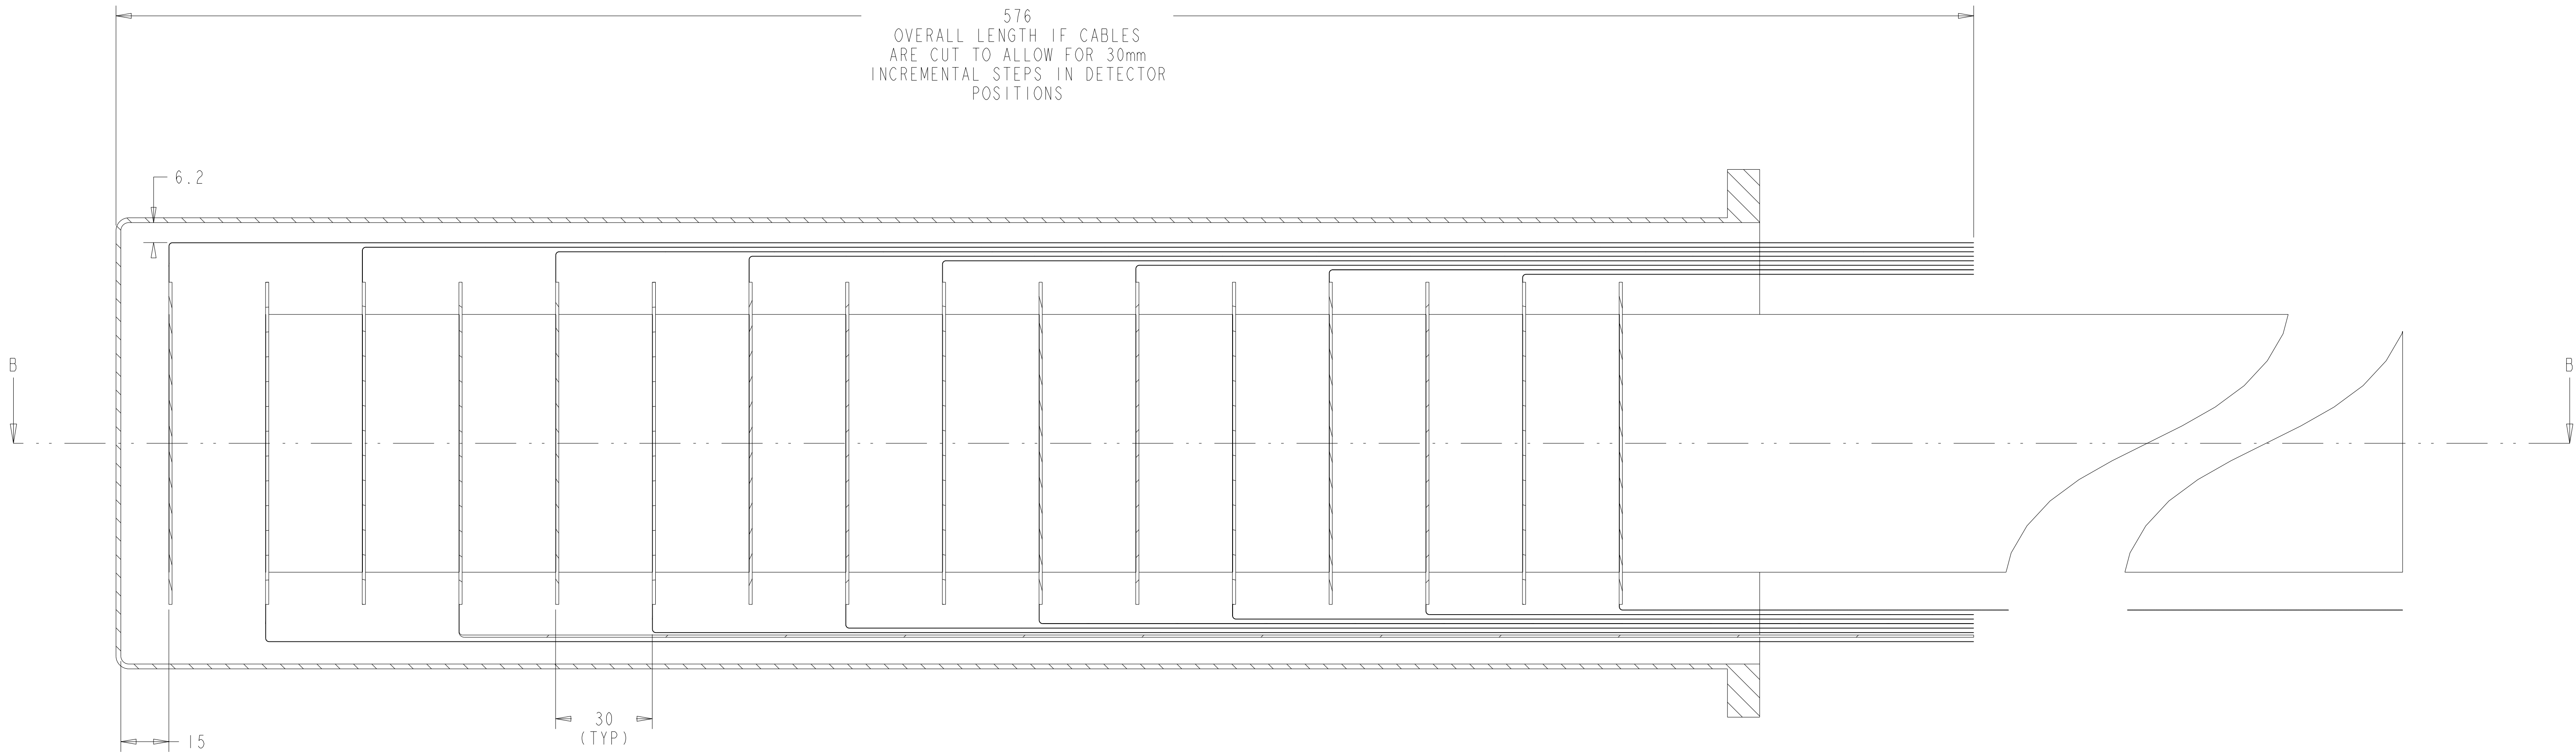

SECTION A-A

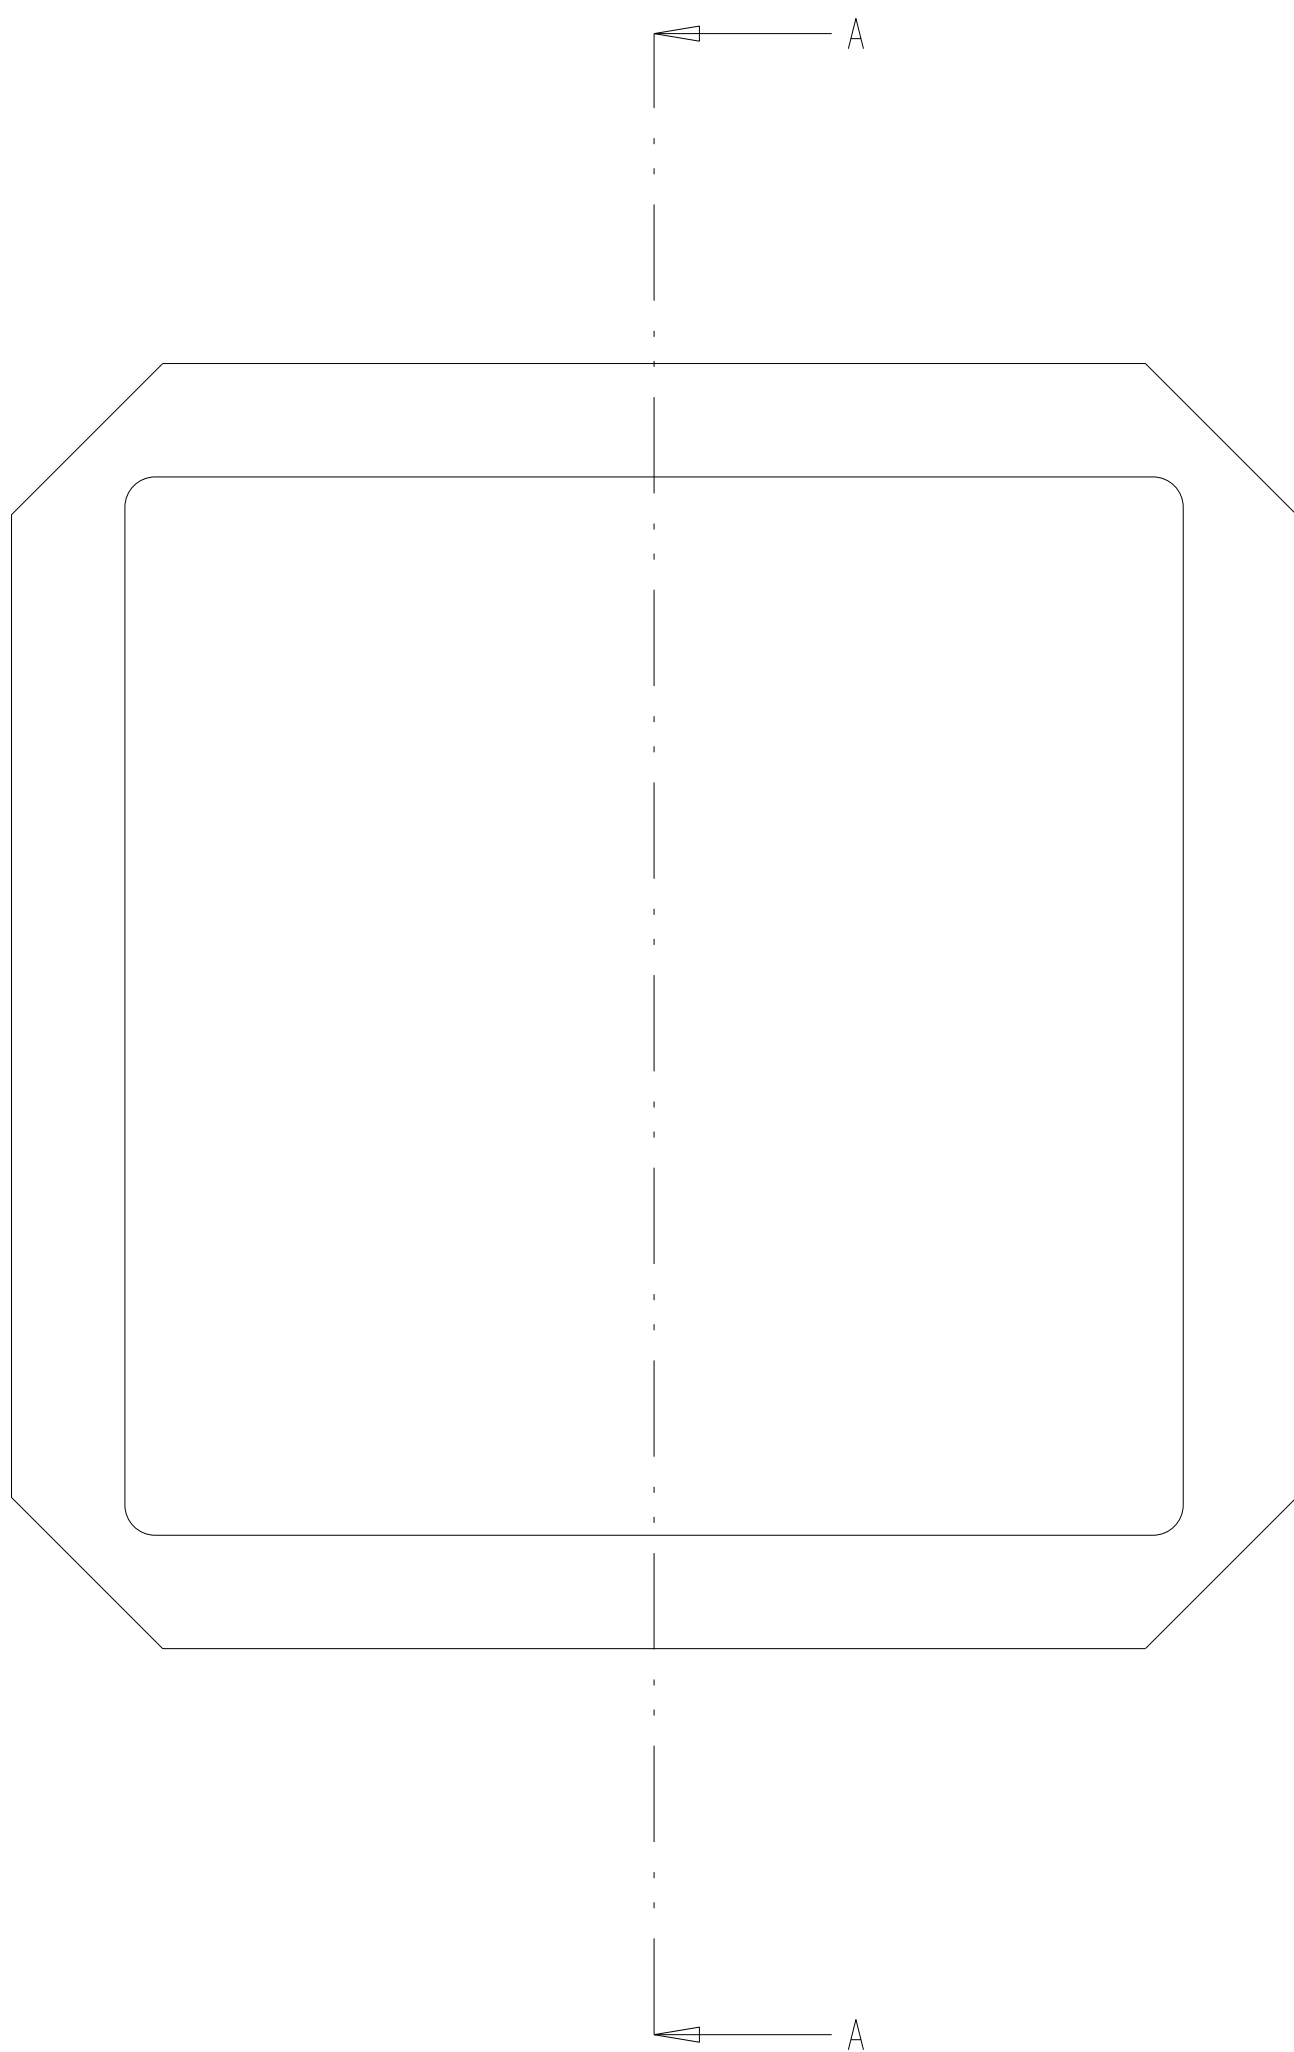

A	10-May-08	D.SEDDON	FIRST ISSUE
ISSUE	DATE	NAME	DESCRIPTION
MODIFICATIONS			

UNLESS OTHERWISE SPECIFIED:- ALL DIMENSIONS IN MILLIMETRES SURFACE TEXTURE VALUES IN MICROMETRES SURFACE TEXTURE TO BE ☒ MACHINE ALL OVER OR WHERE MARKED ☒	METRIC SCREW THREADS TO BS3643 CLASS 6H/6g	DRAWING PRACTICE AND TOLERANCE INTERPRETATION TO BS308	WELDING SYMBOLS TO BS 499	TITLE	
	TOLERANCES UNLESS OTHERWISE SPECIFIED	MATERIAL	DRAWN	80 X 80 mm Si DETECTOR G.A	
	MACHINED DIMS. ± -	SPEC	DATE	DRAWING NUMBER	ARRGT. DRAWING
	ANGULAR ± - °	TREATMENT	CHECKED	A-61	
REMOVE BURRS AND BREAK SHARP EDGES	DO NOT SCALE	FINISH	APPROVED	SHEET	OF
				1	SHEETS
				SCALE:1:000	A0